
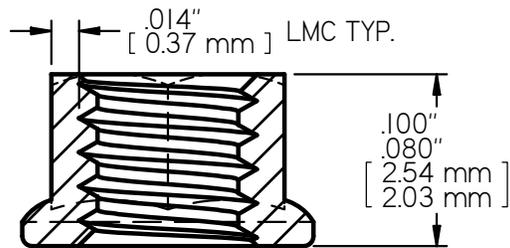


LEAST MATERIAL CONDITION


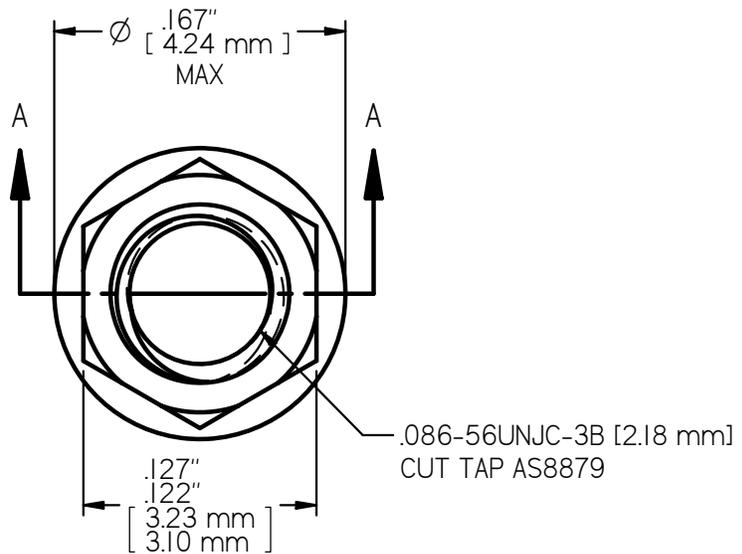


SECTION A-A

10X SCALE

MS21043L02 LOCK NUT
AXIAL STRENGTH: 465 LBS. [2,068 N.] MIN



LEAST MATERIAL CONDITION

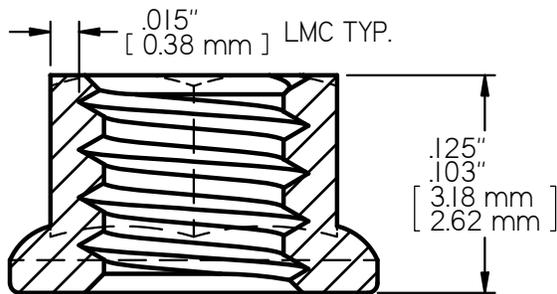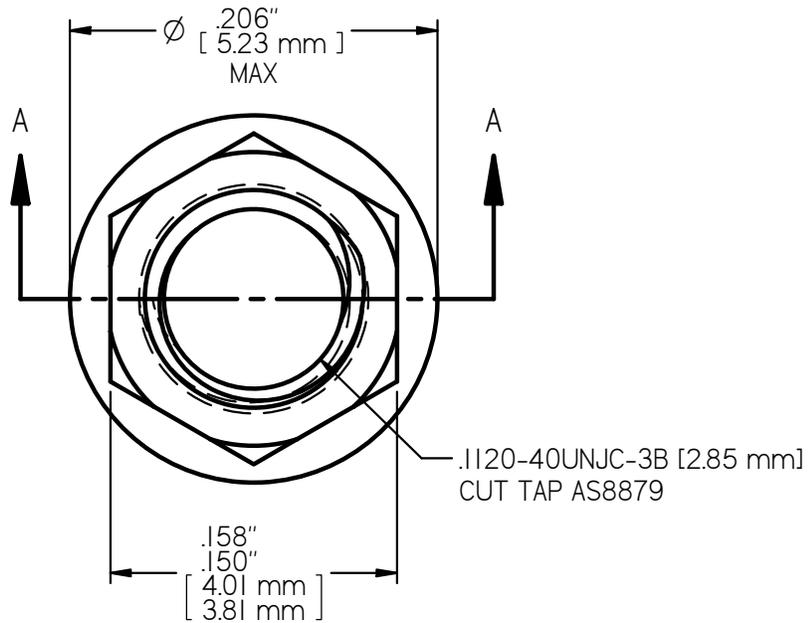

SECTION A-A
10X SCALE

MS21042L04 LOCK NUT
AXIAL STRENGTH: 1,110 LBS. [4,938 N.] MIN



LEAST MATERIAL CONDITION

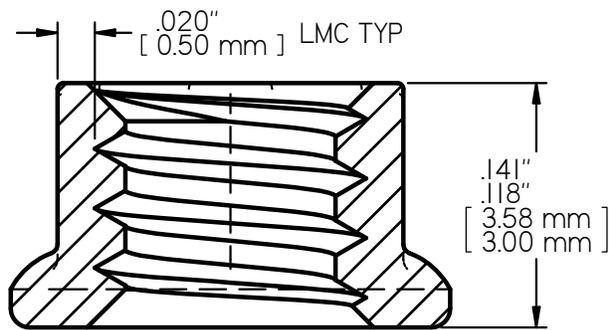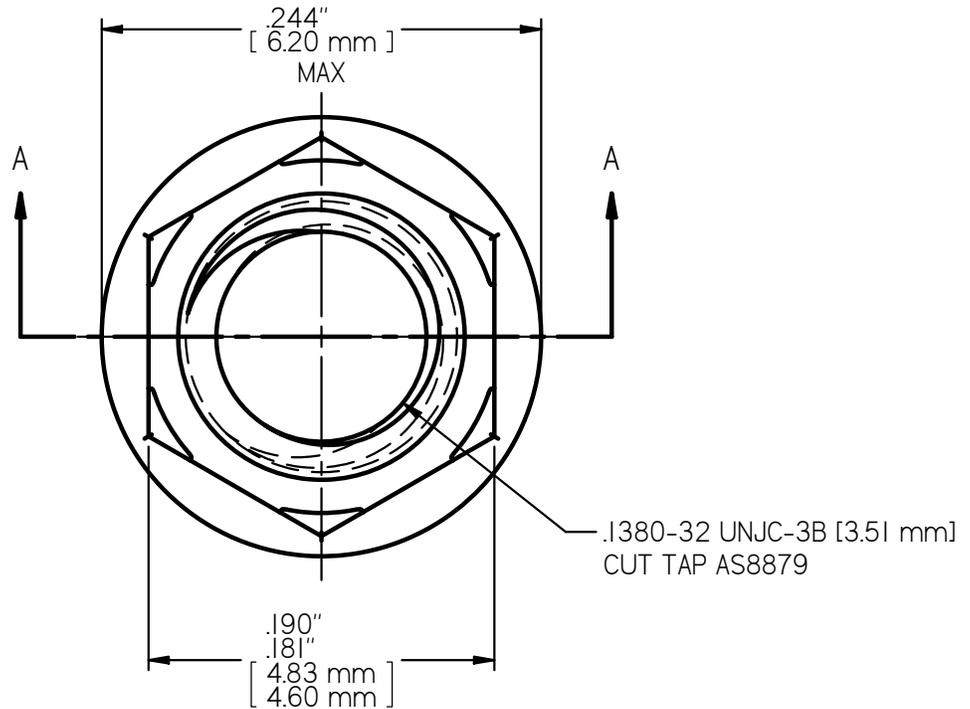

SECTION A-A
10X SCALE

MS21042L06 LOCK NUT
AXIAL STRENGTH: 1,670 LBS. [$7,429 \text{ N.}$] MIN



LEAST MATERIAL CONDITION

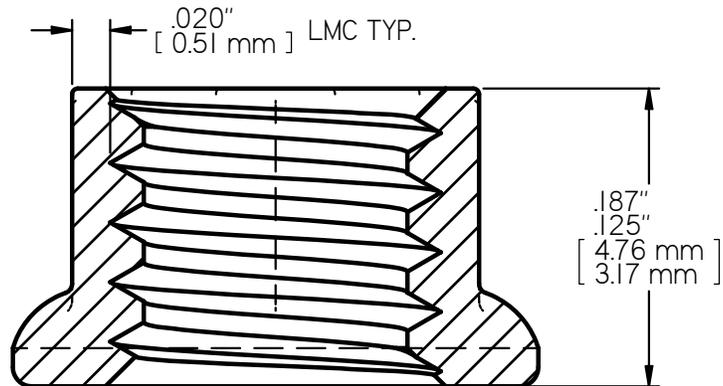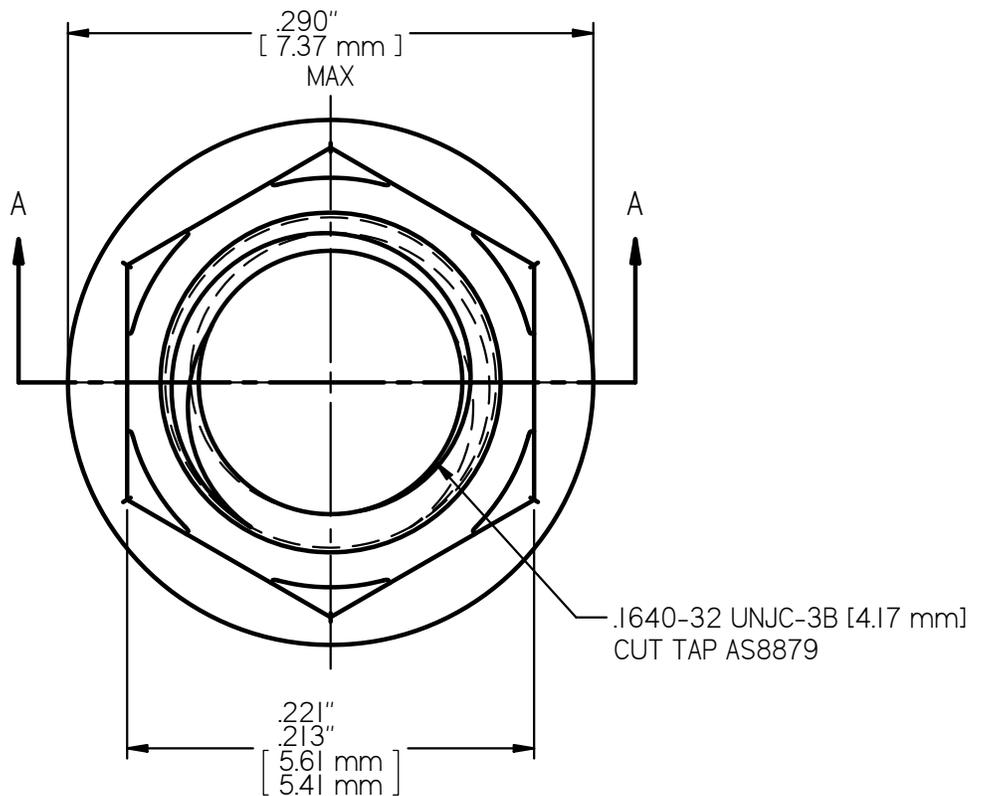

SECTION A-A
10X SCALE

MS21042L08 LOCK NUT
AXIAL STRENGTH: 2,490 LBS. [11,076 N.] MIN



LEAST MATERIAL CONDITION

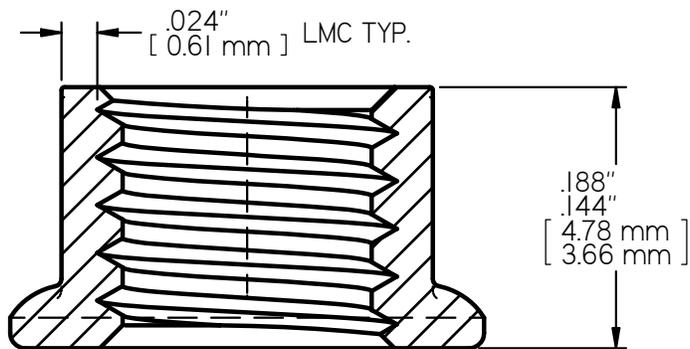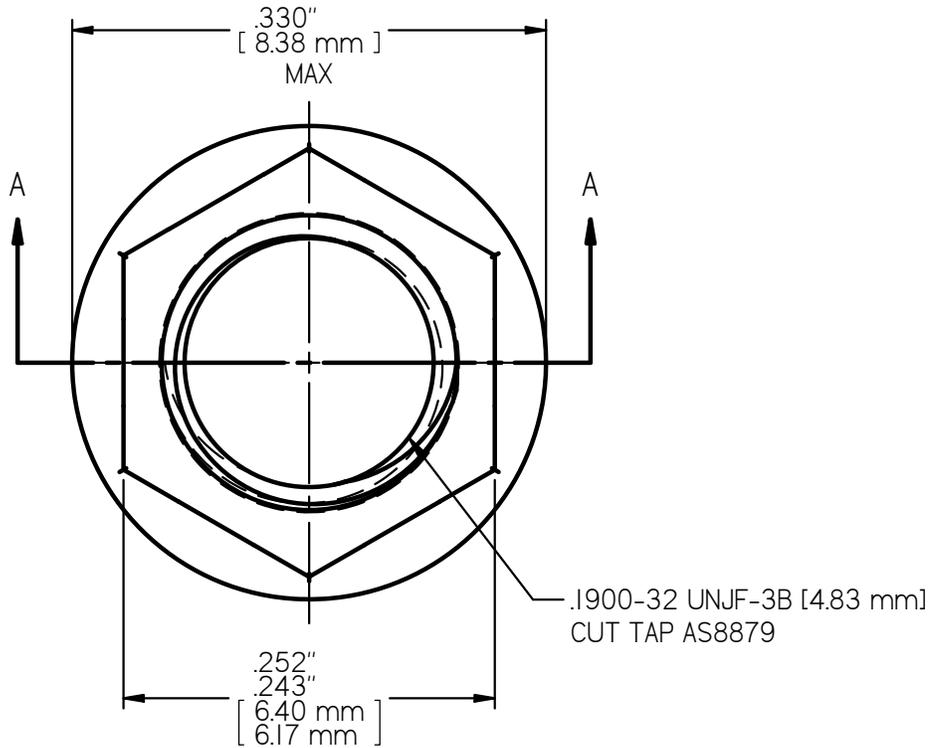

SECTION A-A
8X SCALE

MS21042L3 LOCK NUT
AXIAL STRENGTH: 3,470 LBS. [15,435 N.] MIN



LEAST MATERIAL CONDITION

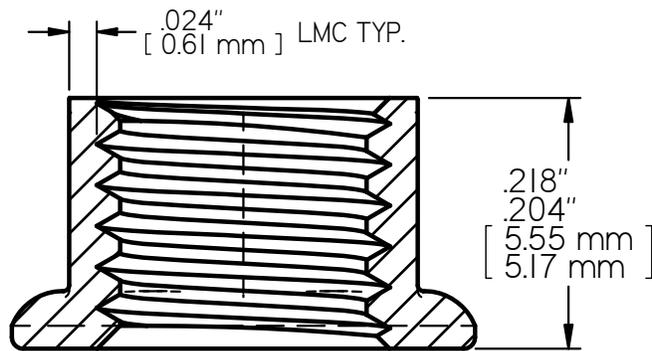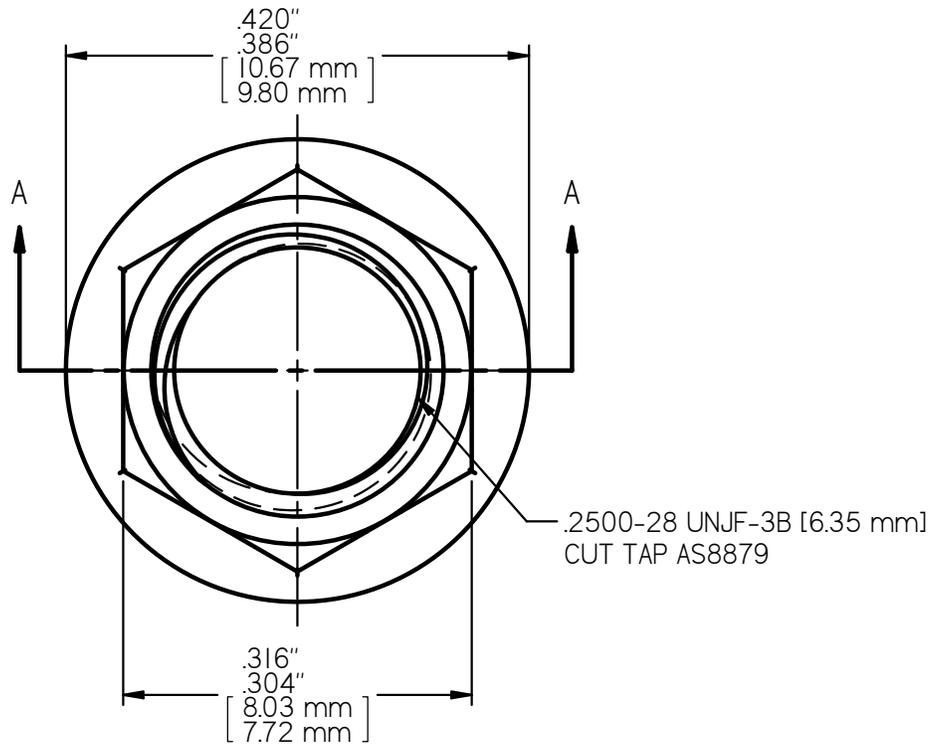

SECTION A-A
6X SCALE

MS21042L4 LOCK NUT
AXIAL STRENGTH: 6,200 LBS. [27,579 N.] MIN



LEAST MATERIAL CONDITION

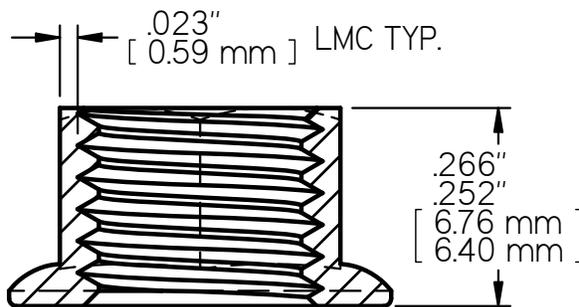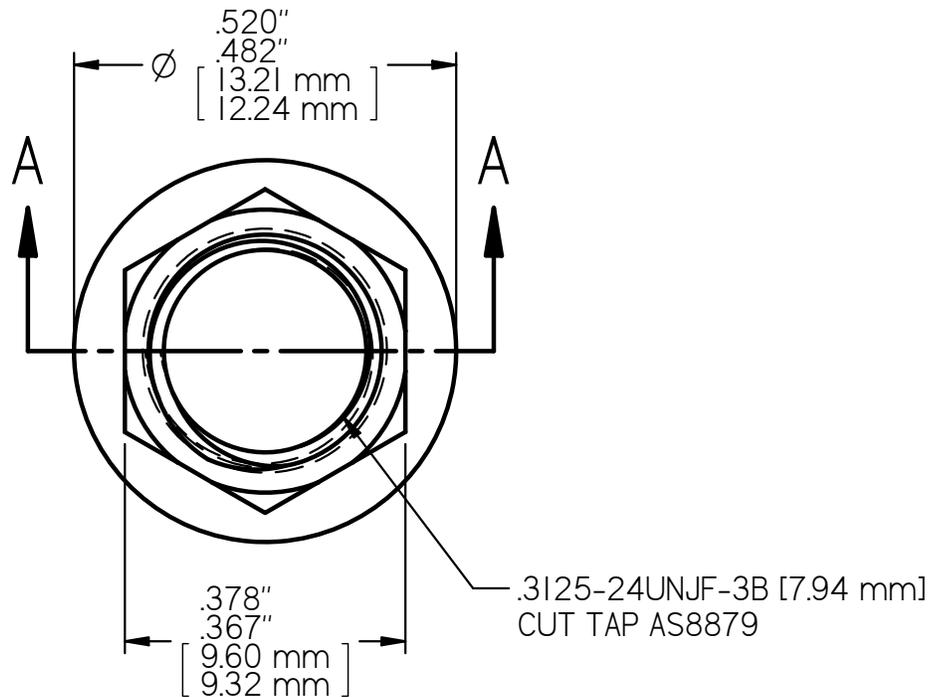

SECTION A-A
4X SCALE

MS21042L5 LOCK NUT
AXIAL STRENGTH: 9,820 LBS. [43,682 N.] MIN

LEAST MATERIAL CONDITION

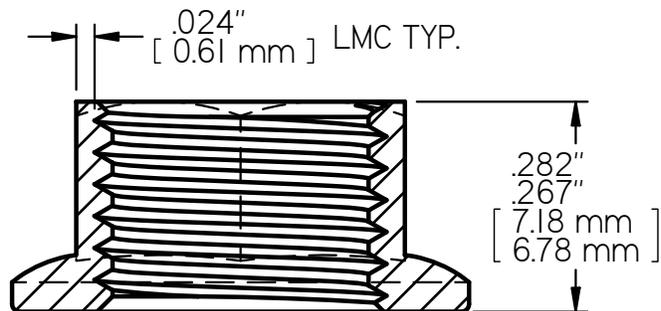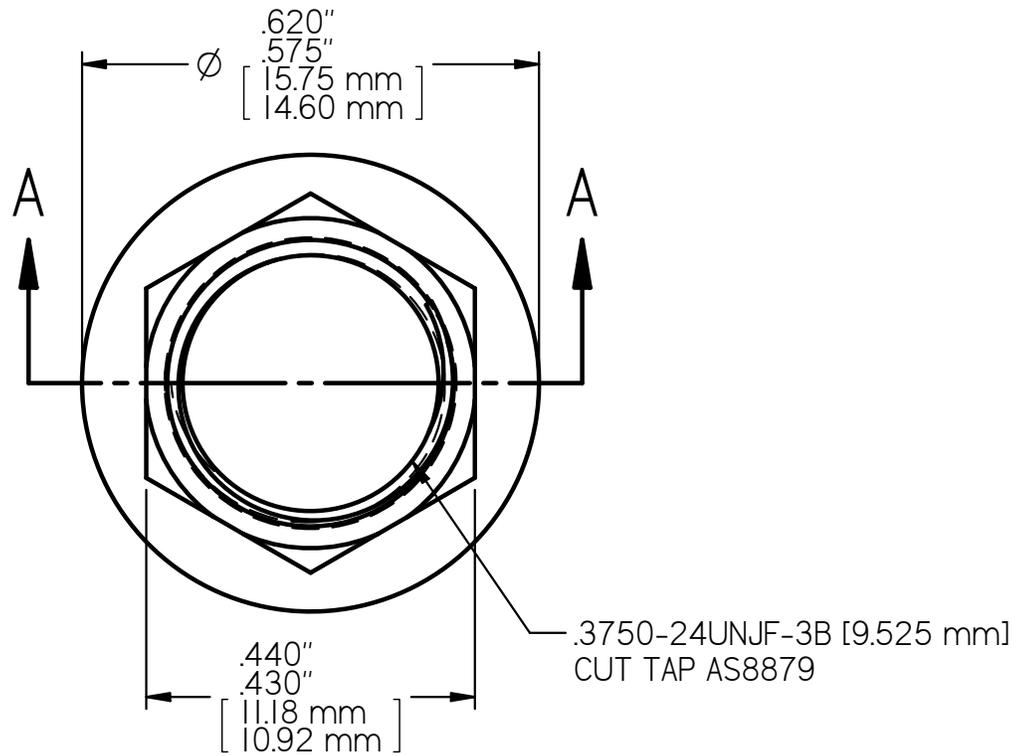

SECTION A-A
4X SCALE

MS21042L6 LOCK NUT
AXIAL STRENGTH: 15,200 LBS. $[67,613 \text{ N.}]$ MIN