
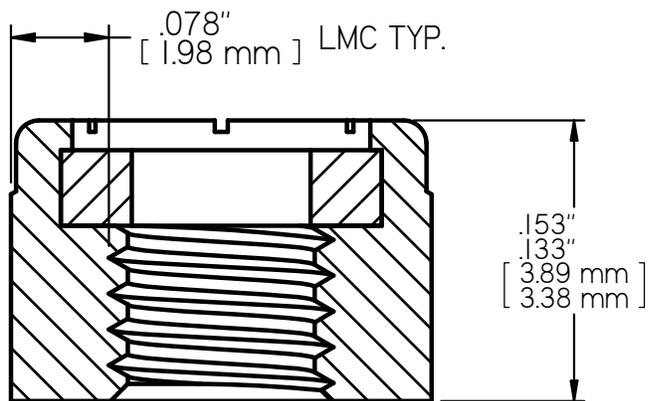




LEAST MATERIAL CONDITION

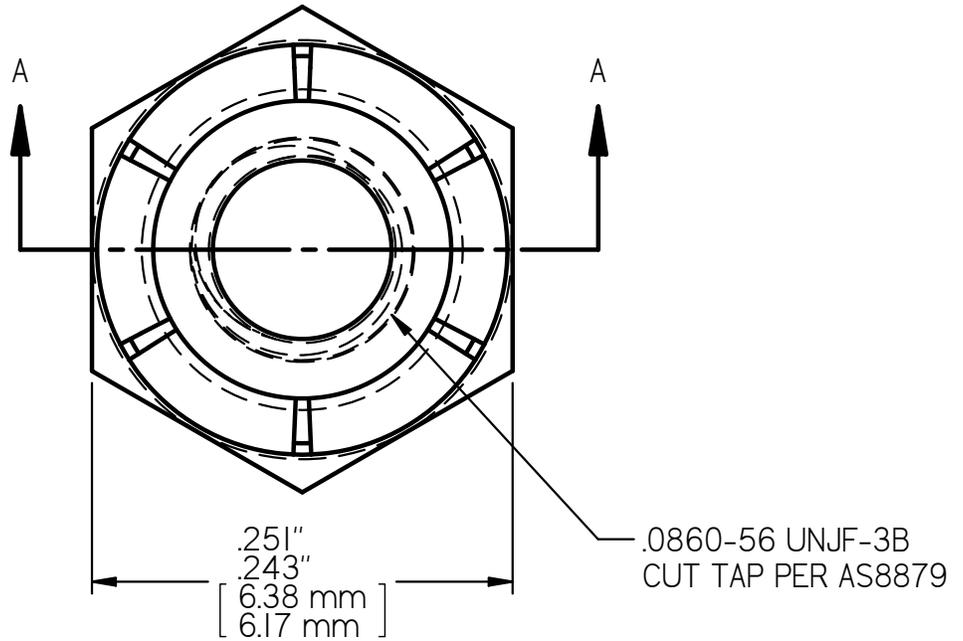

SECTION A-A
8X SCALE

MS21044N02 LOCK NUT
AXIAL STRENGTH: 440 LBS. [1,957 N.] MIN



LEAST MATERIAL CONDITION

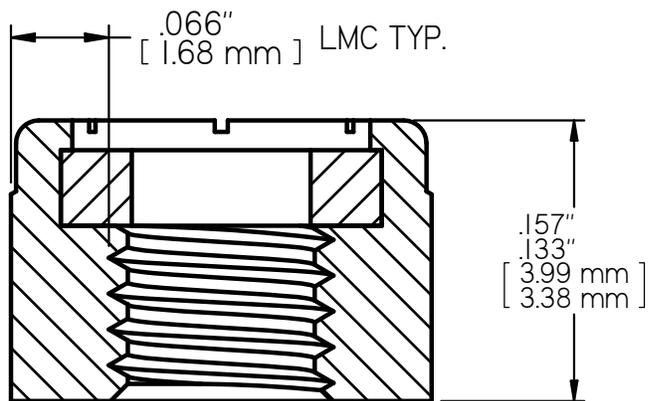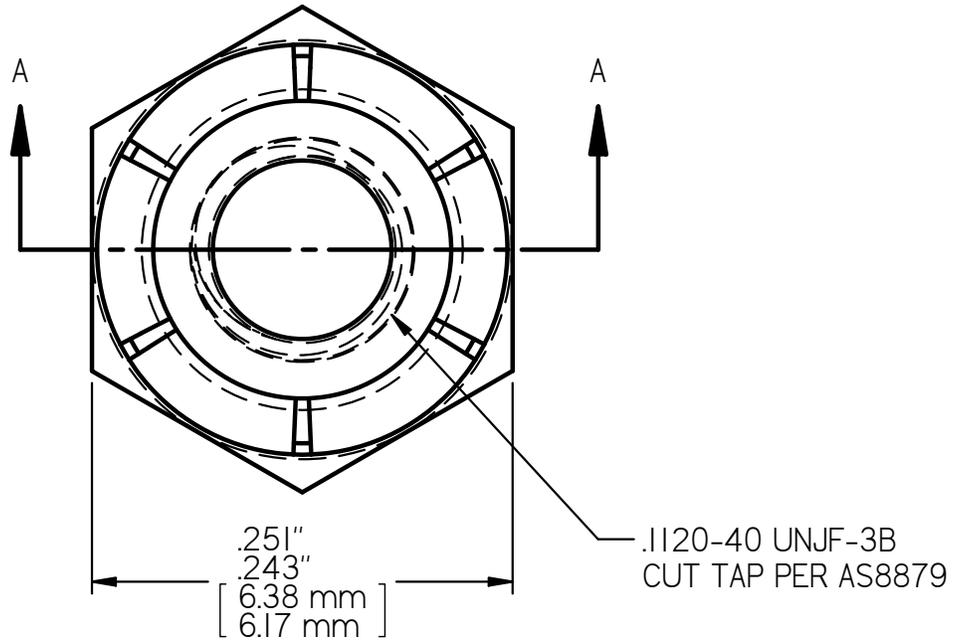

SECTION A-A
8X SCALE

MS21044N04 LOCK NUT
AXIAL STRENGTH: 750 LBS. [3,336 N.] MIN



LEAST MATERIAL CONDITION

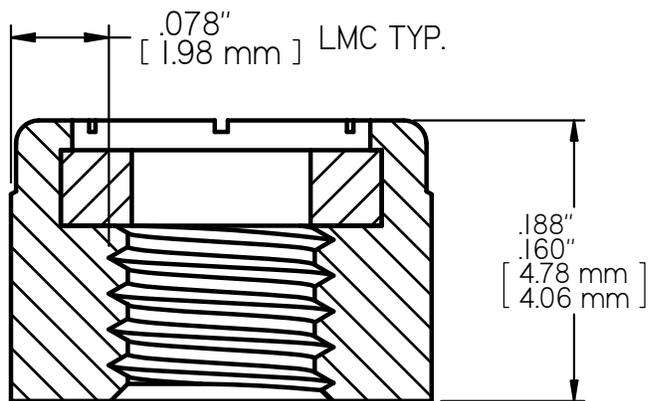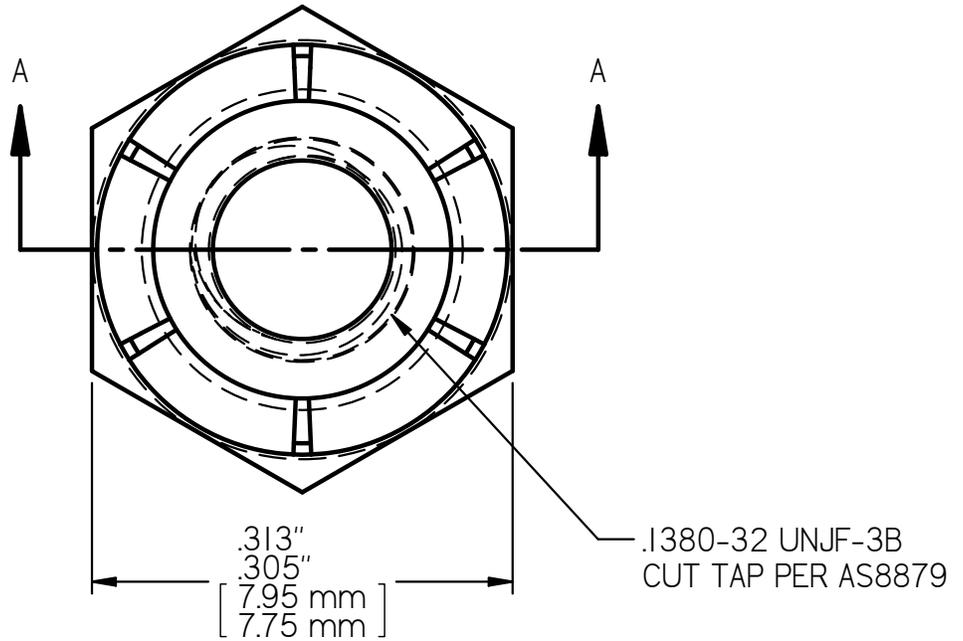

SECTION A-A
7X SCALE

MS21044N06 LOCK NUT
AXIAL STRENGTH: 1,130 LBS. [5,026 N.] MIN



LEAST MATERIAL CONDITION

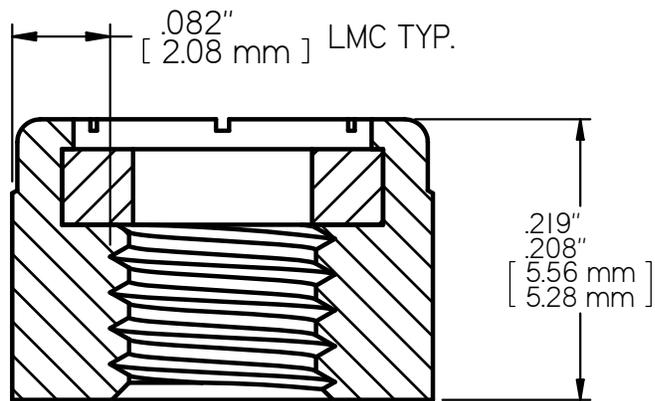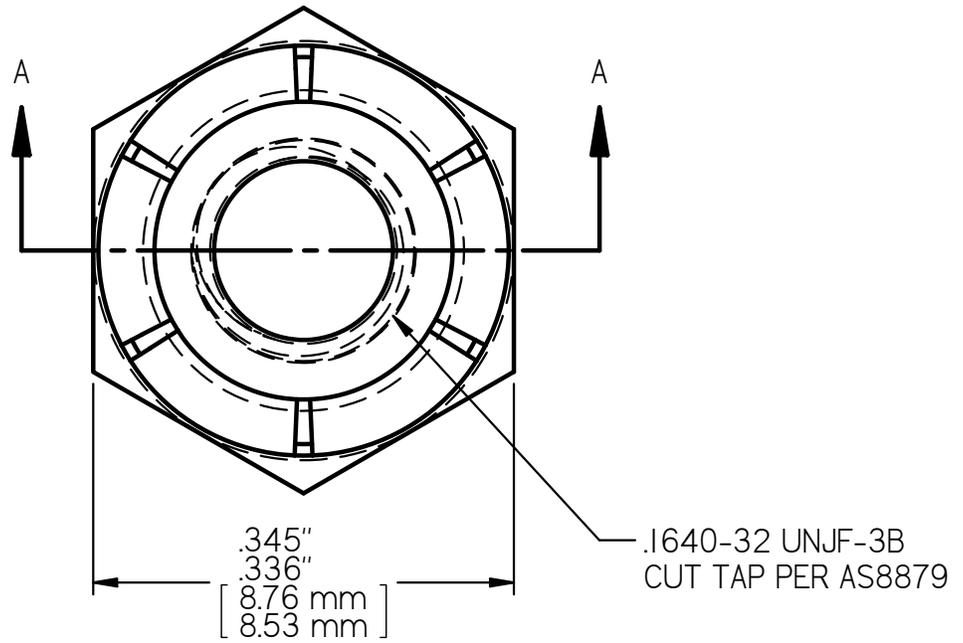

SECTION A-A
6X SCALE

MS21044N08 LOCK NUT
AXIAL STRENGTH: 1,720 LBS. [7,651 N.] MIN



LEAST MATERIAL CONDITION

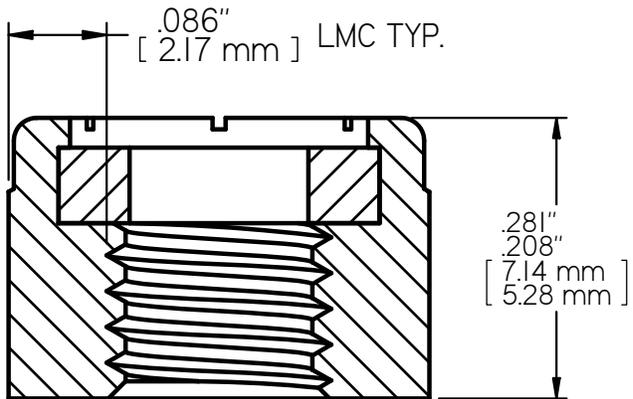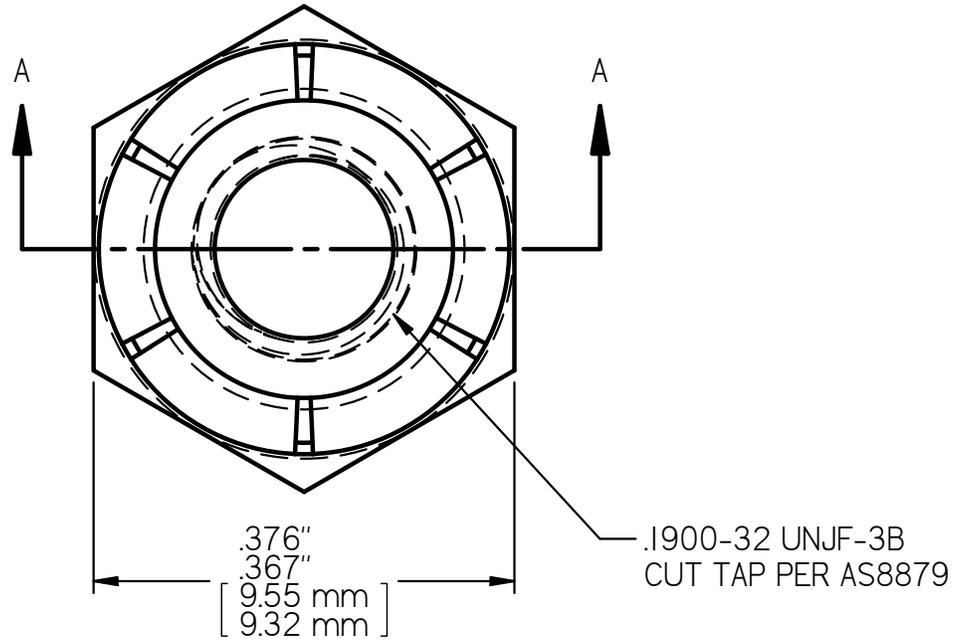

SECTION A-A
6X SCALE

MS21044N3 LOCK NUT
AXIAL STRENGTH: 2,460 LBS. [10,943 N.] MIN



LEAST MATERIAL CONDITION

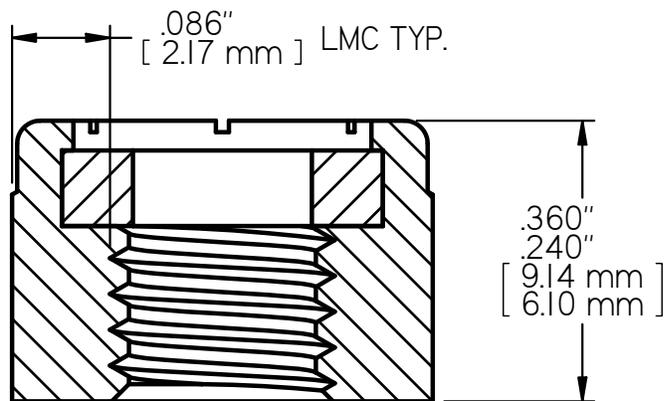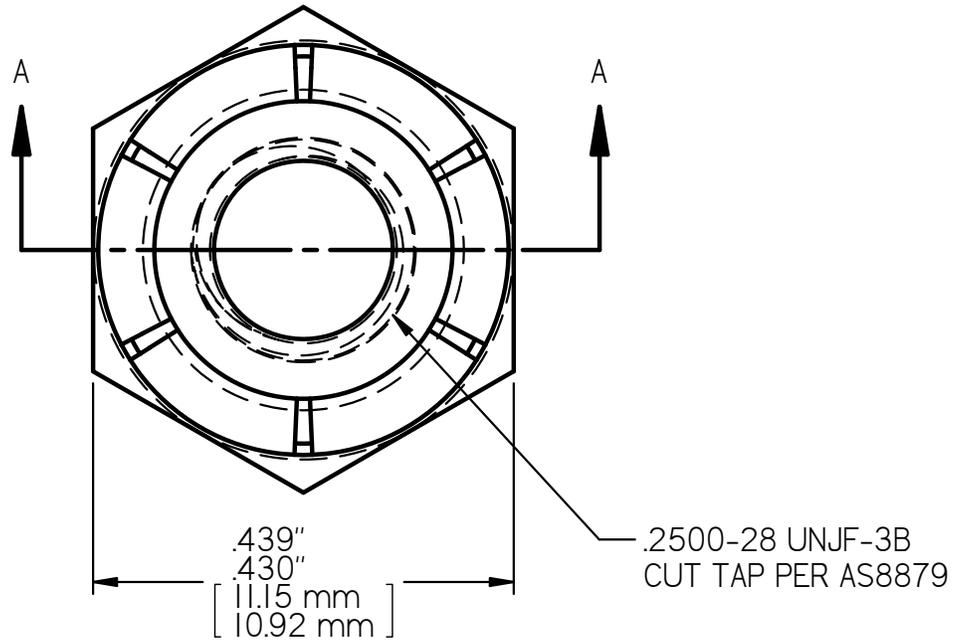

SECTION A-A
5X SCALE

MS21044N4 LOCK NUT
AXIAL STRENGTH: 4,580 LBS. [20,373 N.] MIN



LEAST MATERIAL CONDITION

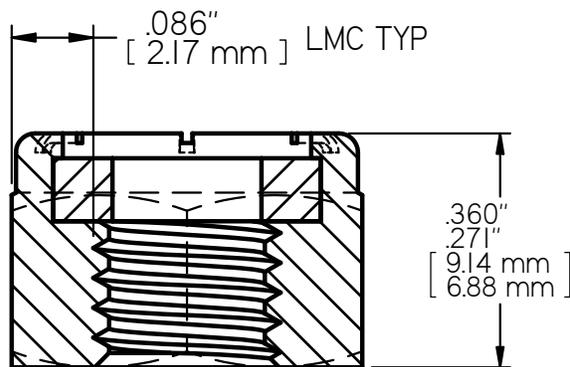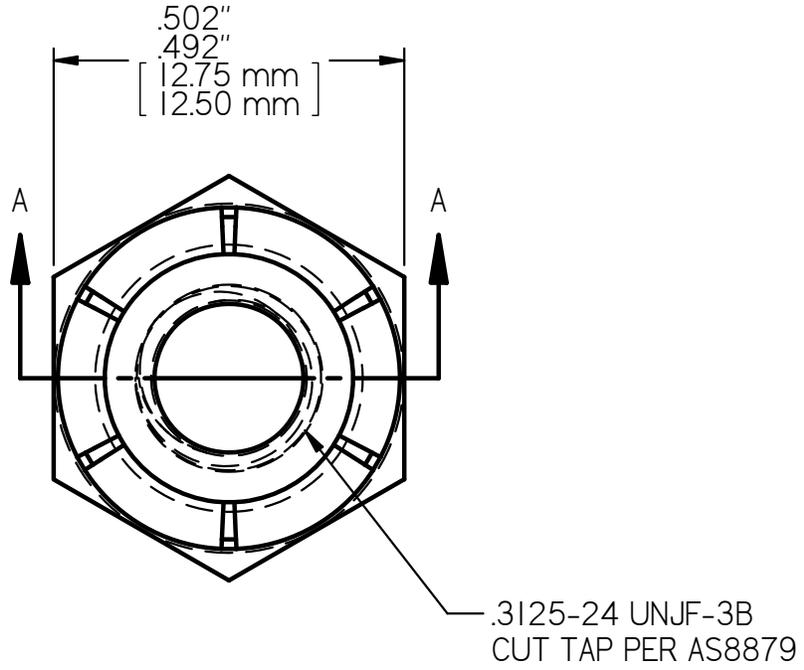

SECTION A-A
4X SCALE

MS21044N5 LOCK NUT
AXIAL STRENGTH: 7,390 LBS. [32,872 N.] MIN



LEAST MATERIAL CONDITION

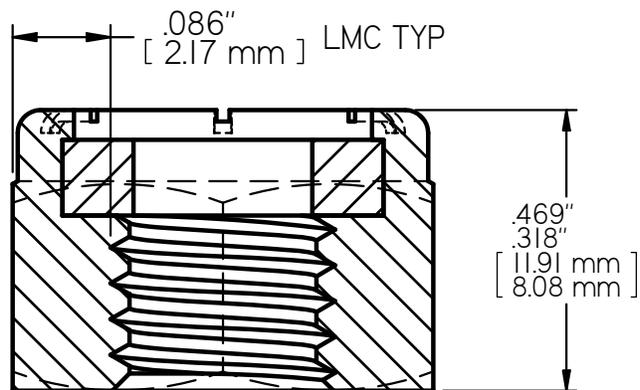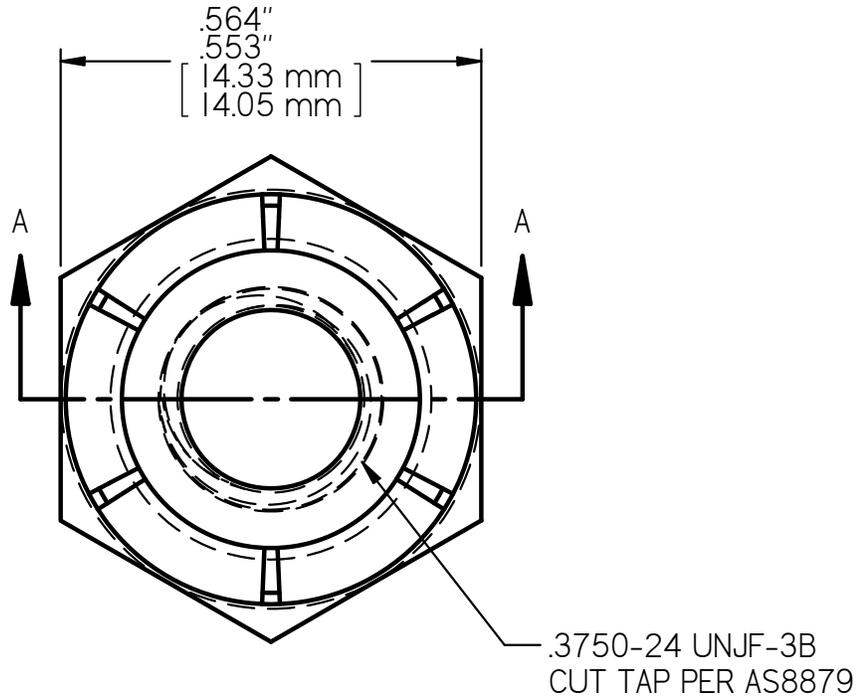

SECTION A-A
4X SCALE

MS21044N6 LOCK NUT
AXIAL STRENGTH: 11,450 LBS. [50,932 N.] MIN



LEAST MATERIAL CONDITION

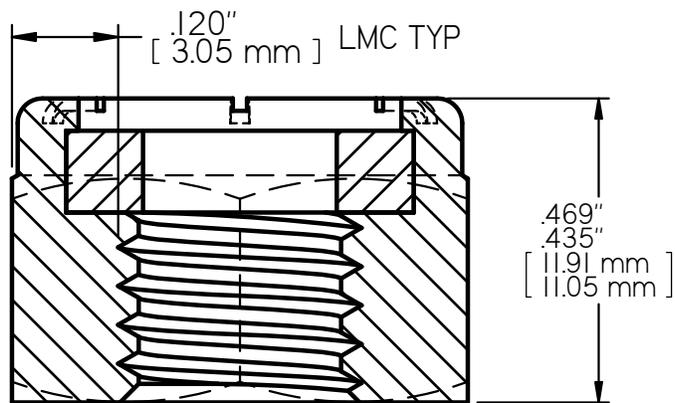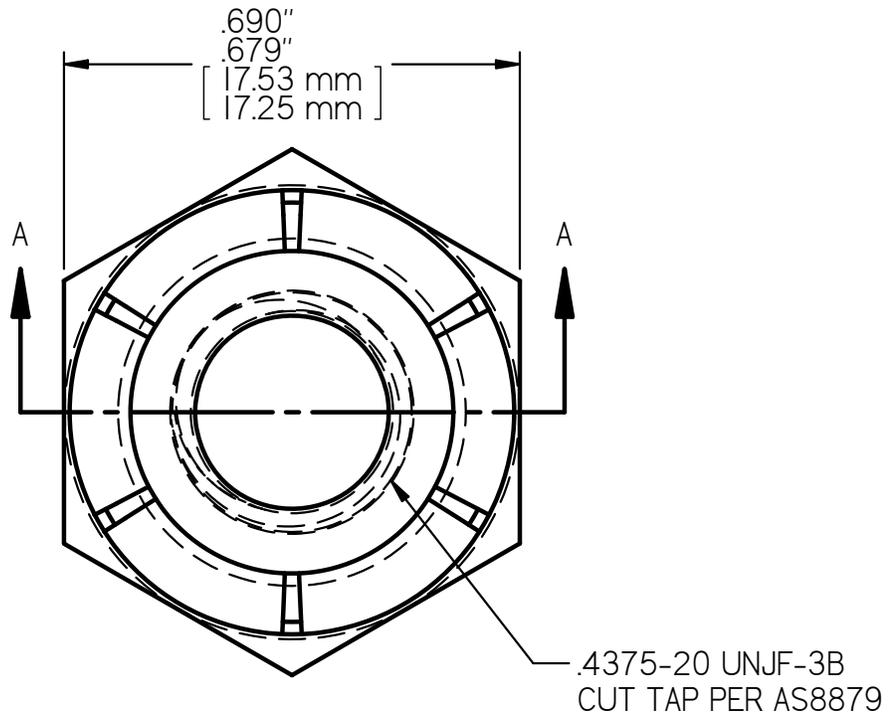

SECTION A-A
4X SCALE

MS21044N7 LOCK NUT
AXIAL STRENGTH: 15,450 LBS. [68,725 N.] MIN



LEAST MATERIAL CONDITION

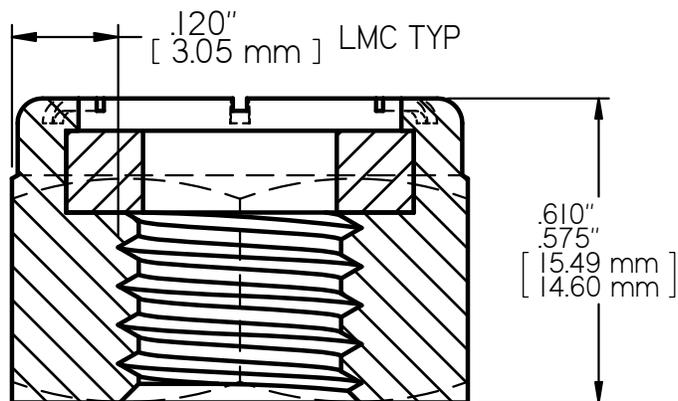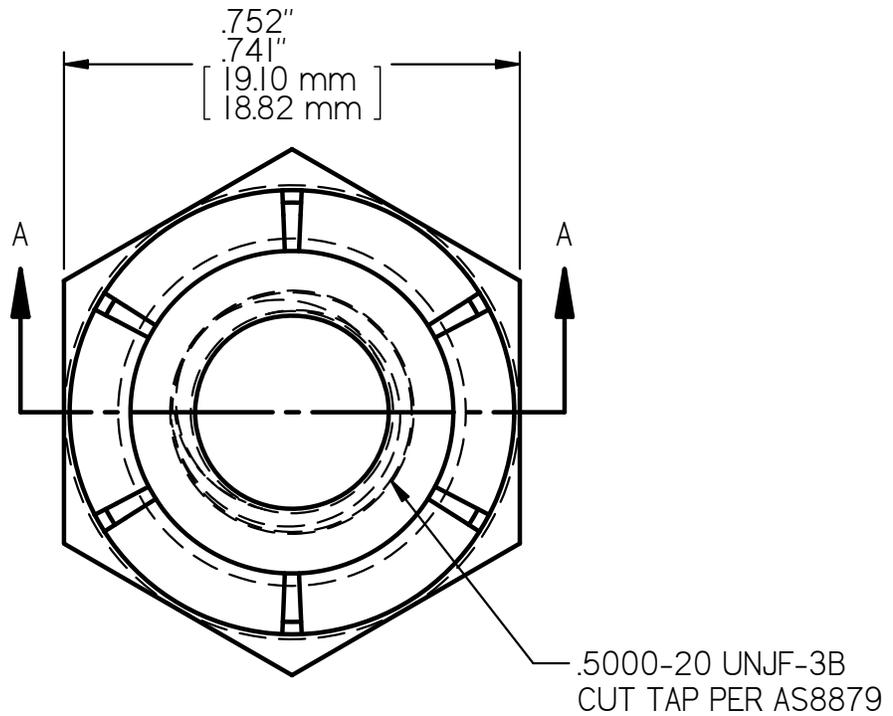

SECTION A-A
3X SCALE

MS21044N8 LOCK NUT
AXIAL STRENGTH: 21,110 LBS. [93,902 N.] MIN



LEAST MATERIAL CONDITION

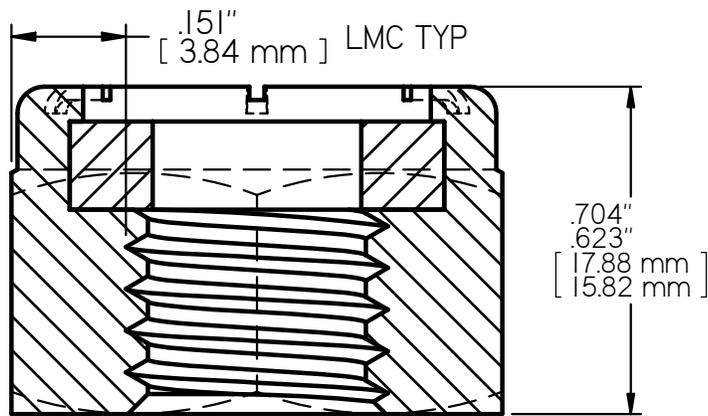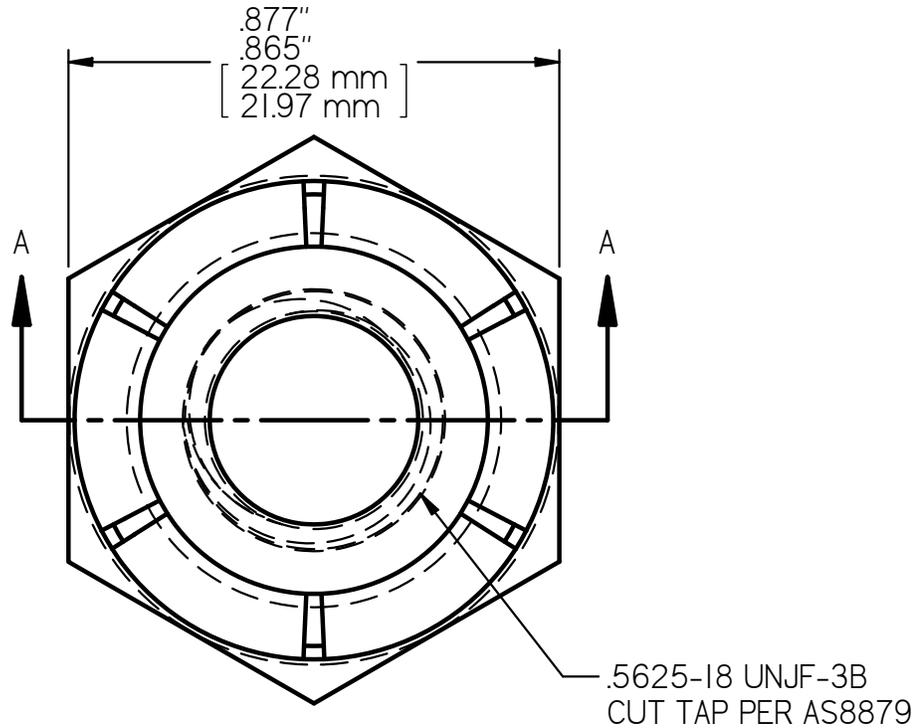

SECTION A-A
3X SCALE

MS21044N9 LOCK NUT
AXIAL STRENGTH: 26,810 LBS. [119,257 N.] MIN

LEAST MATERIAL CONDITION

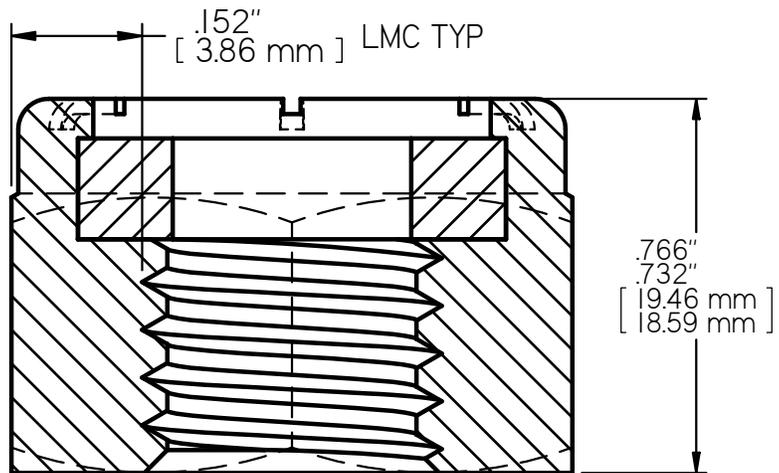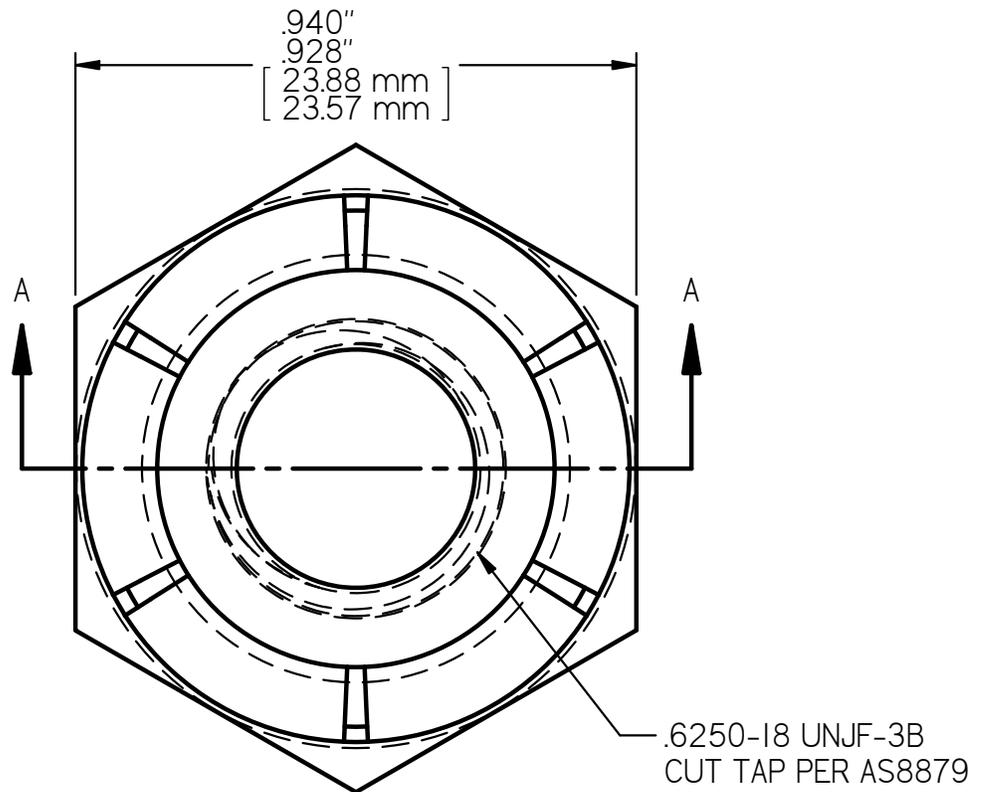

SECTION A-A
3X SCALE

MS21044N10 LOCK NUT
AXIAL STRENGTH: 34,130 LBS. [151,818 N.] MIN