
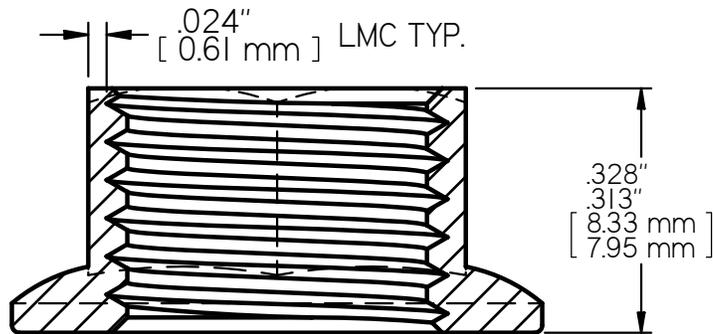




LEAST MATERIAL CONDITION

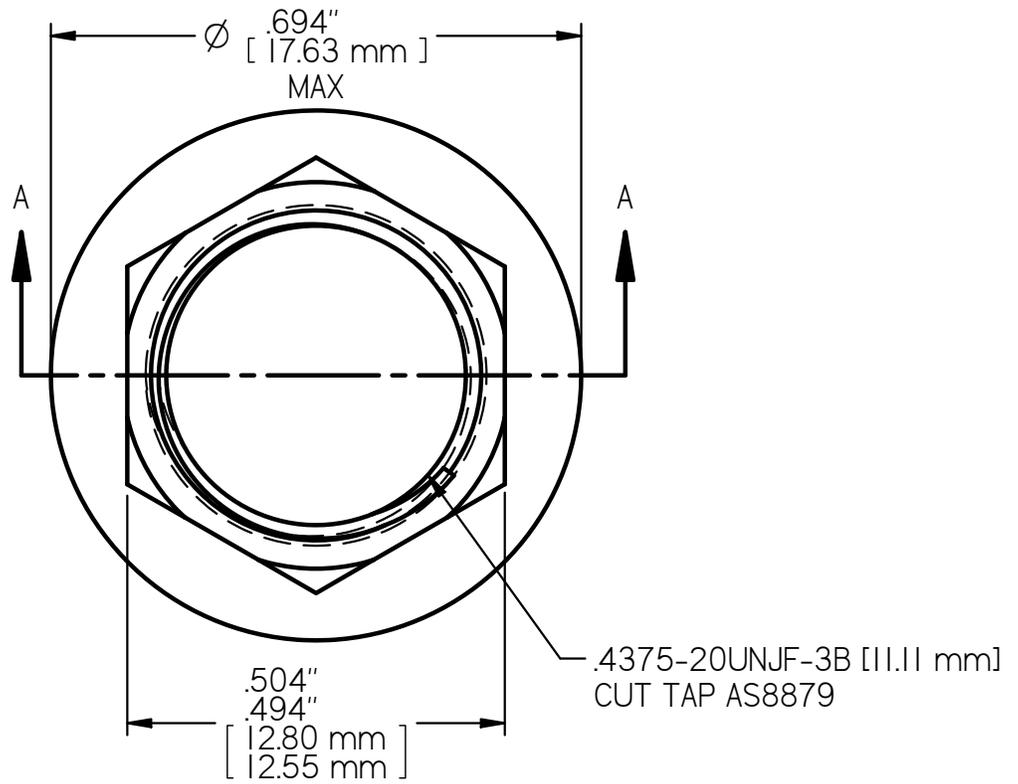

SECTION A-A
4X SCALE

NAS1291C7 LOCK NUT
AXIAL STRENGTH: 15,450 LBS. [68,725 N.] MIN



LEAST MATERIAL CONDITION

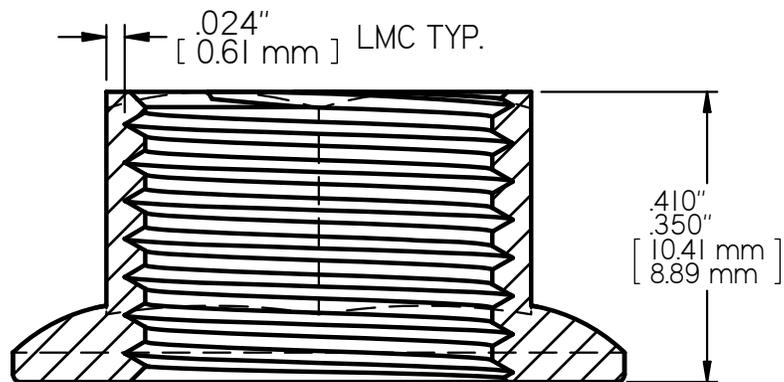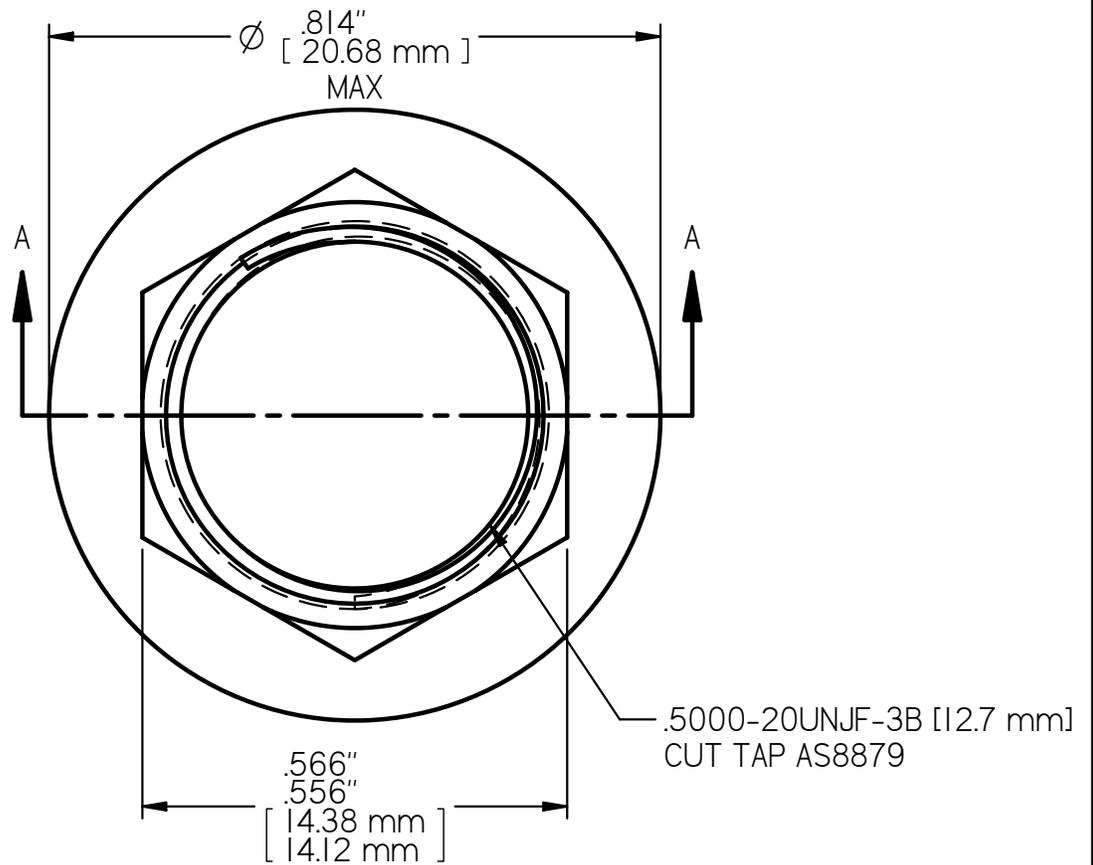

SECTION A-A
4X SCALE

NAS1291C8 LOCK NUT
AXIAL STRENGTH: 21,110 LBS. [93,903 N.] MIN



LEAST MATERIAL CONDITION

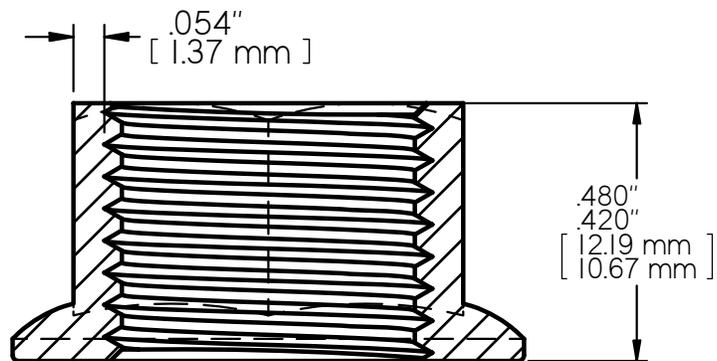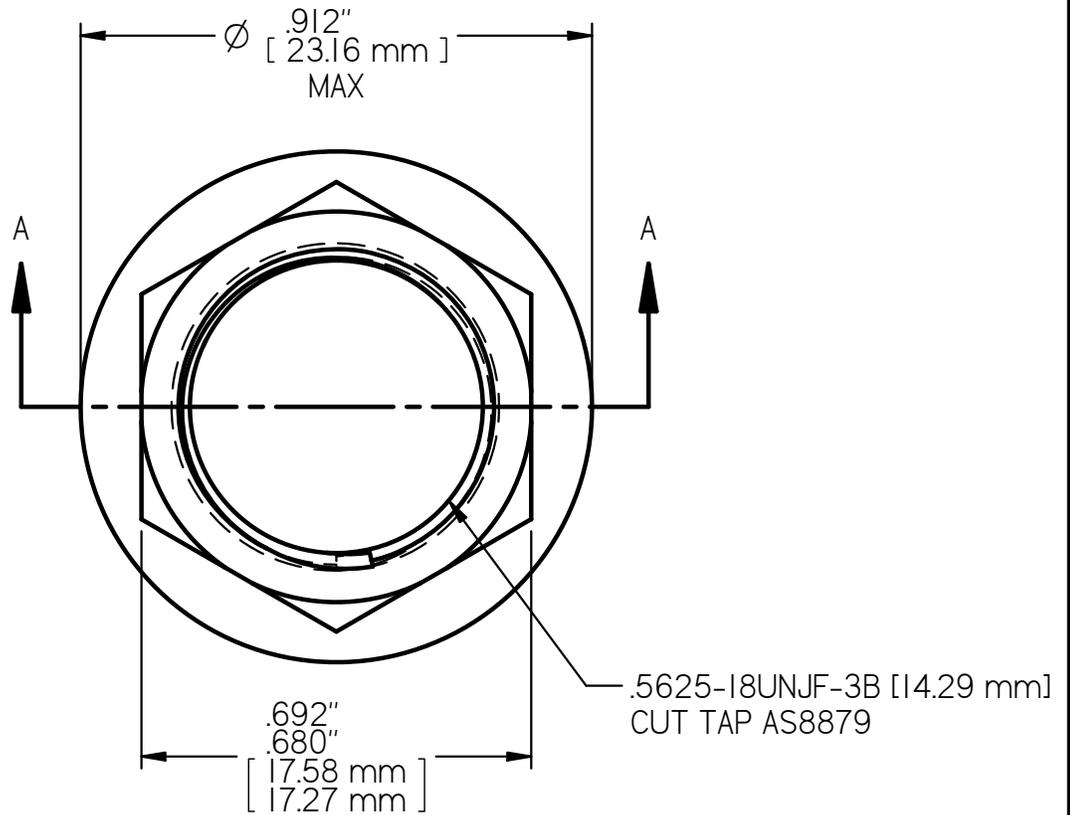

SECTION A-A
3X SCALE

NAS1291C9 LOCK NUT
AXIAL STRENGTH: 26,810 LBS. [119,257 N.] MIN

LEAST MATERIAL CONDITION

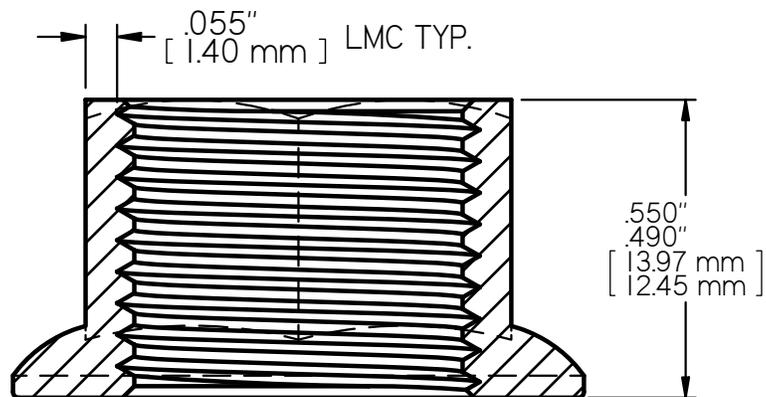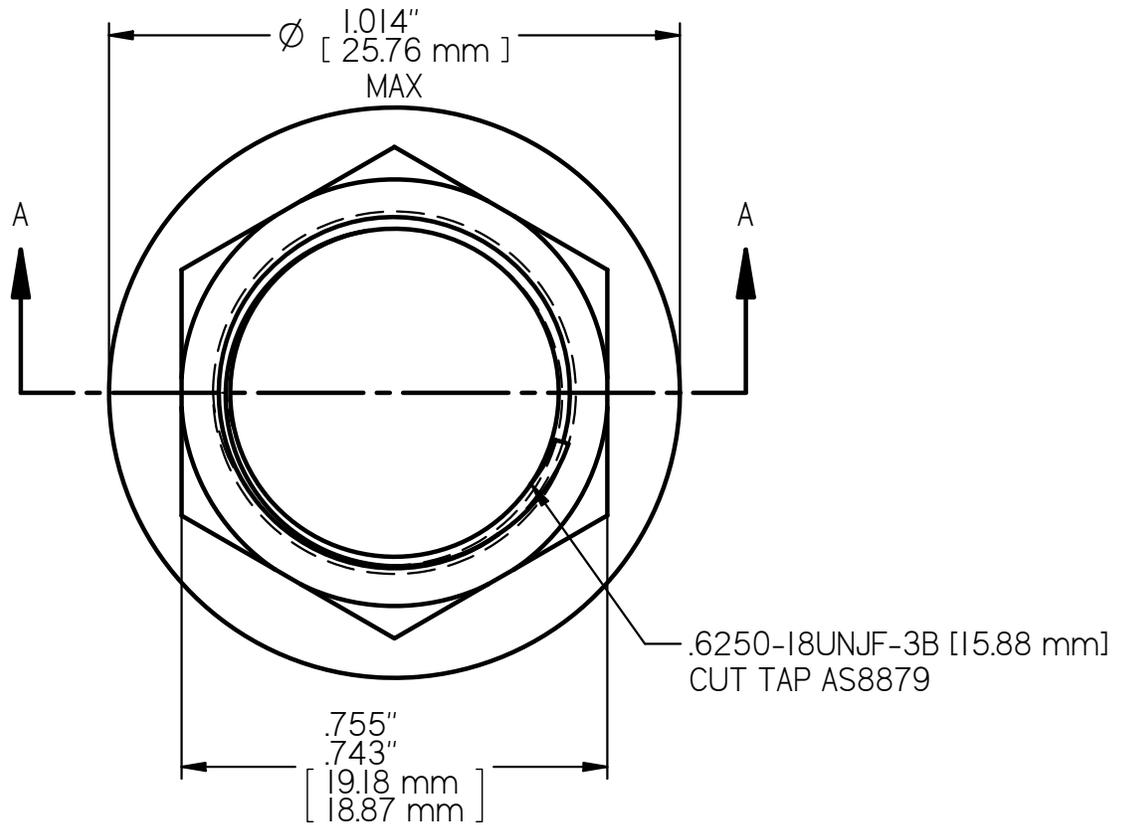

3X SCALE
SECTION A-A

NAS1291C10 LOCK NUT
AXIAL STRENGTH: 34,130 LBS. [151,818 N.] MIN