
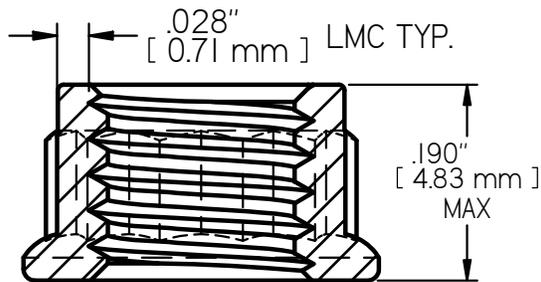




# LEAST MATERIAL CONDITION

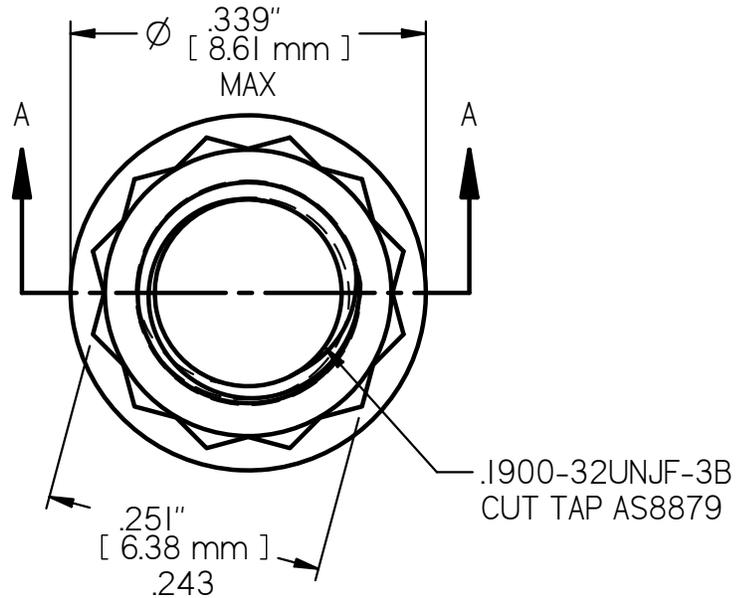

SECTION A-A  
6X SCALE

**NAS1804-3 LOCK NUT**  
**AXIAL STRENGTH: 4,070 LBS. [18,105 N.] MIN**



# LEAST MATERIAL CONDITION

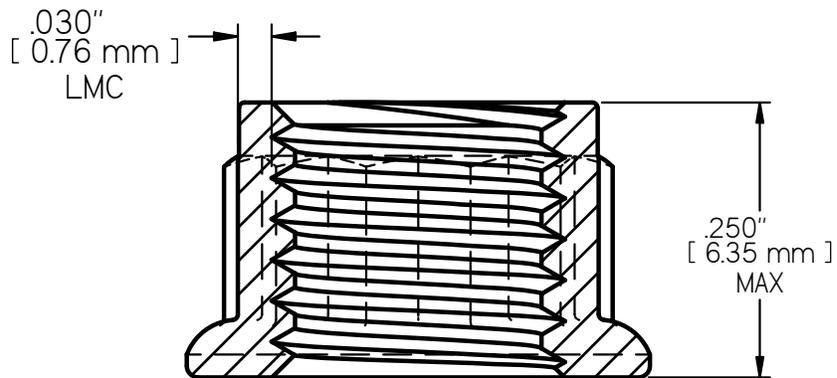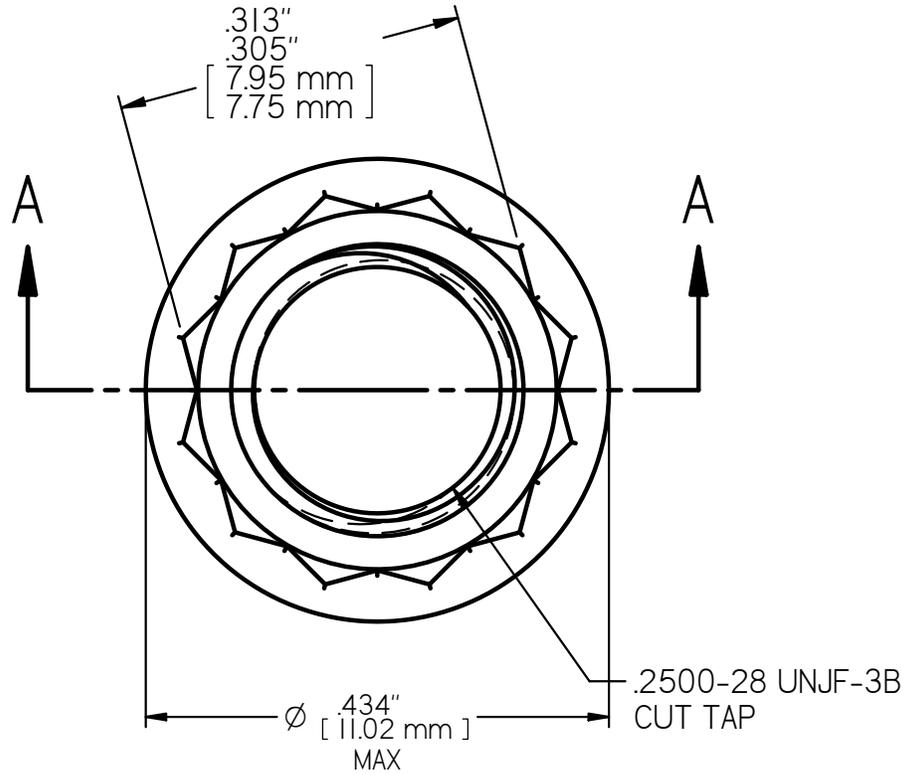

SECTION A-A  
6X SCALE

**NAS1804-4 LOCK NUT**  
**AXIAL STRENGTH: 7,270 LBS. [32,339 N.] MIN**



# LEAST MATERIAL CONDITION

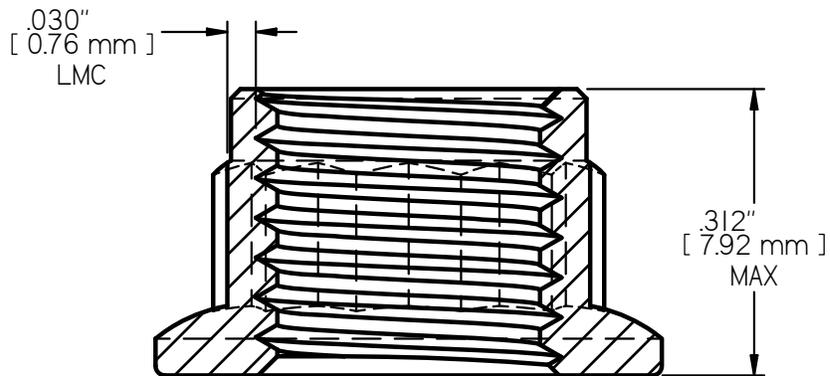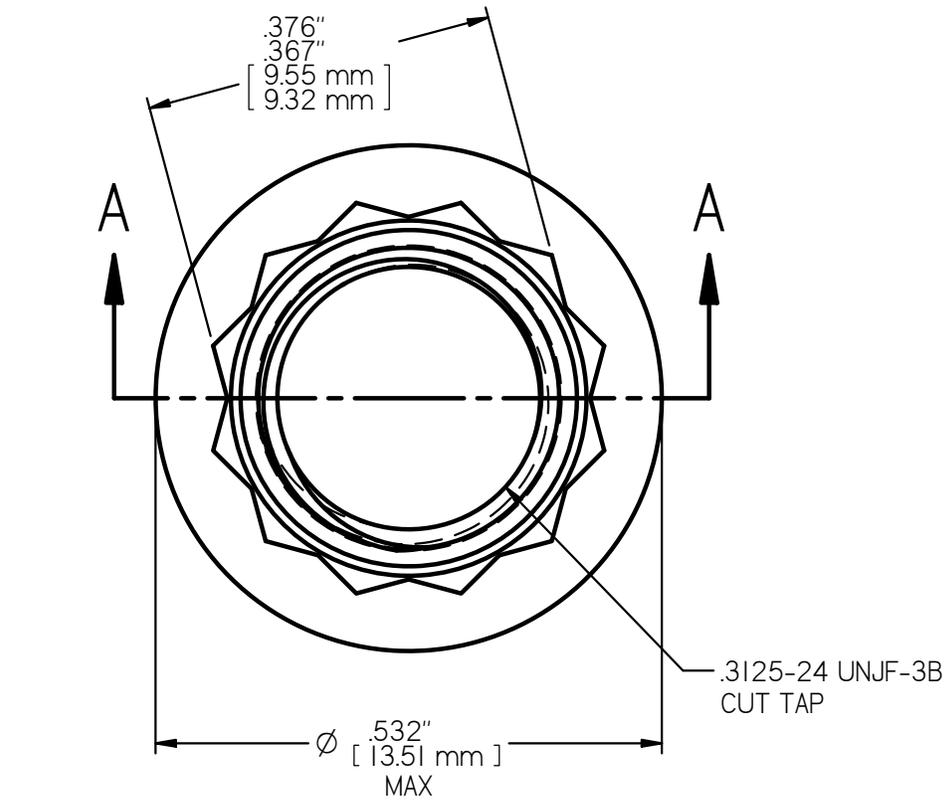

SECTION A-A  
5X SCALE

**NAS1804-5 LOCK NUT**  
**AXIAL STRENGTH: 11,500 LBS. [51,154 N.] MIN**



# LEAST MATERIAL CONDITION

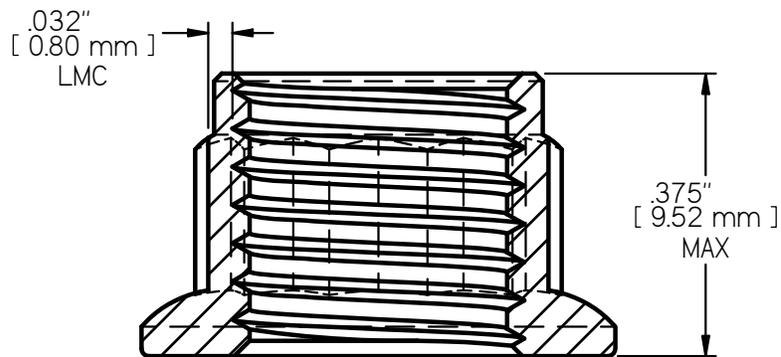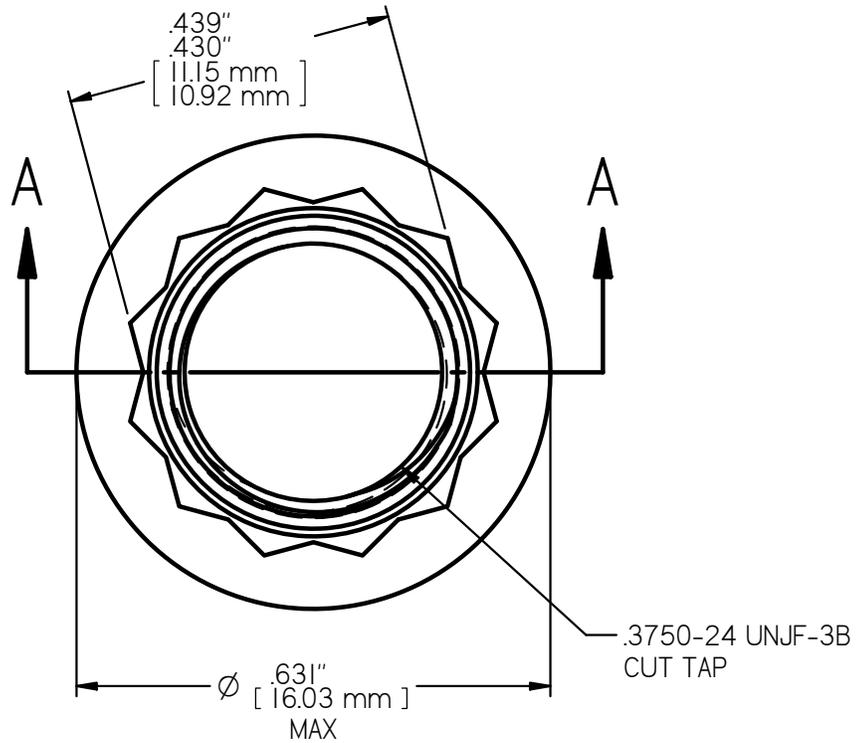

SECTION A-A  
4X SCALE

**NAS1804-6 LOCK NUT**  
**AXIAL STRENGTH: 17,100 LBS. [76,065 N.] MIN**



# LEAST MATERIAL CONDITION

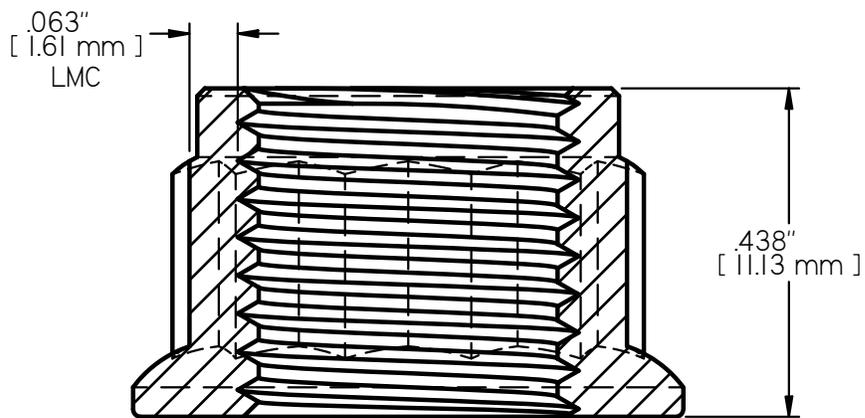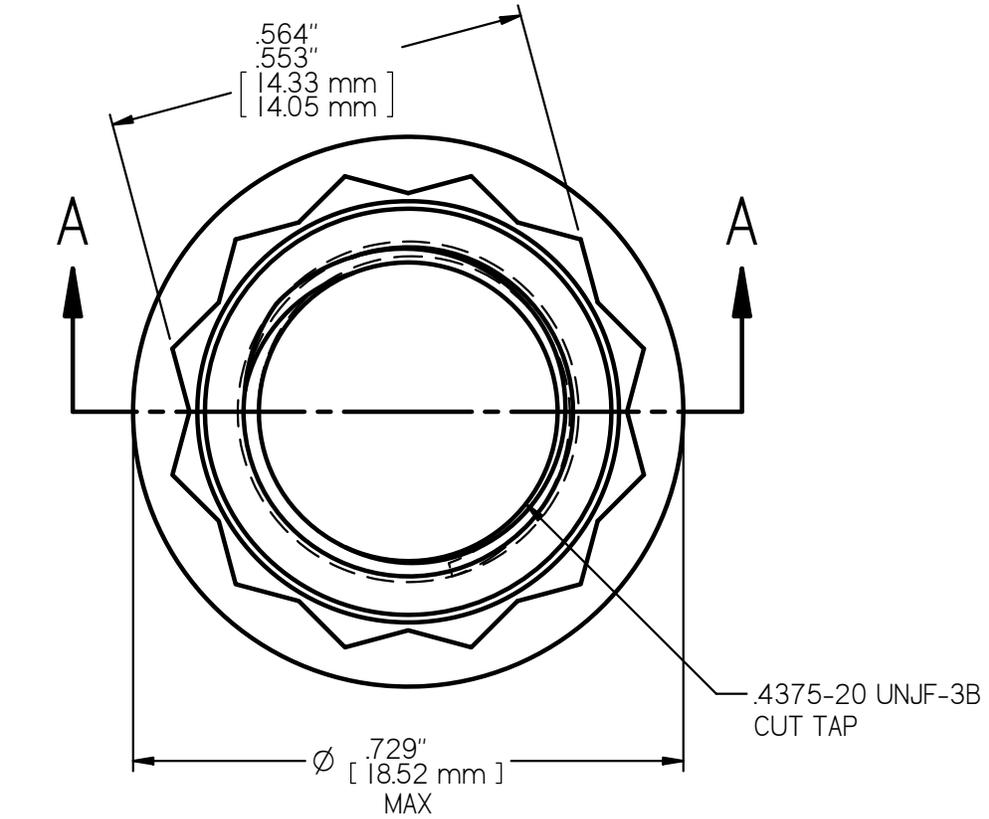

SECTION A-A  
4X SCALE

**NAS1804-7 LOCK NUT**  
**AXIAL STRENGTH: 23,200 LBS. [103,199 N.] MIN**



# LEAST MATERIAL CONDITION

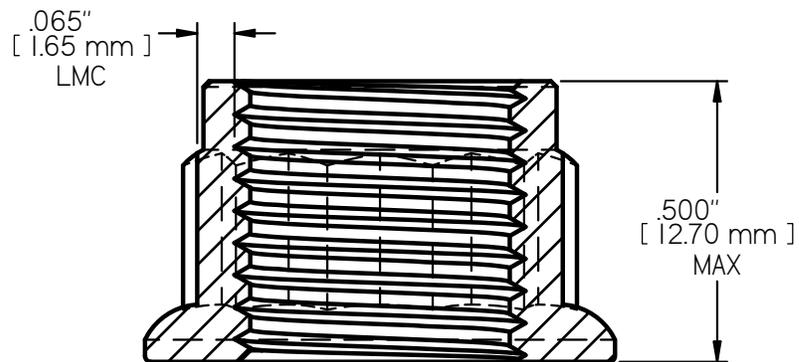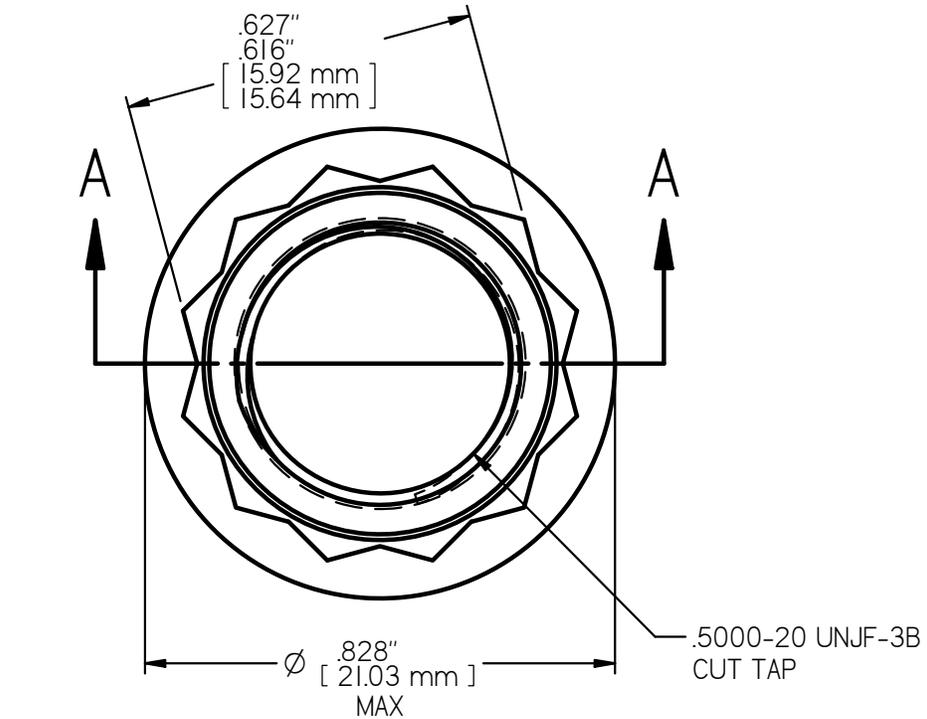

SECTION A-A  
3X SCALE



**NAS1804-8 LOCK NUT**  
**AXIAL STRENGTH: 30,900 LBS. [137,450 N.] MIN**

# LEAST MATERIAL CONDITION

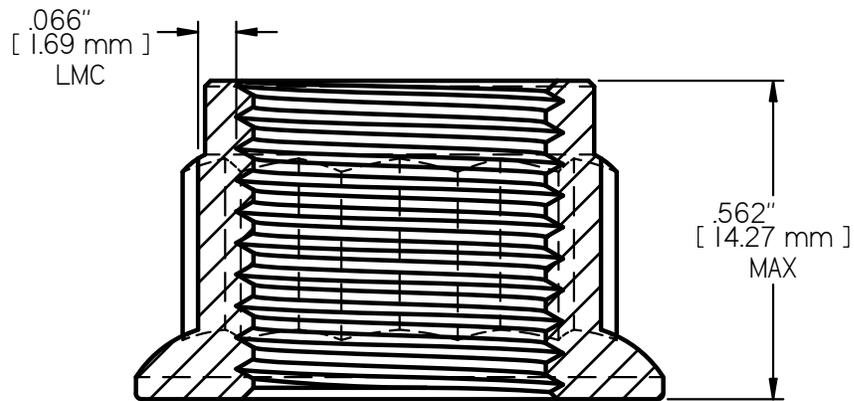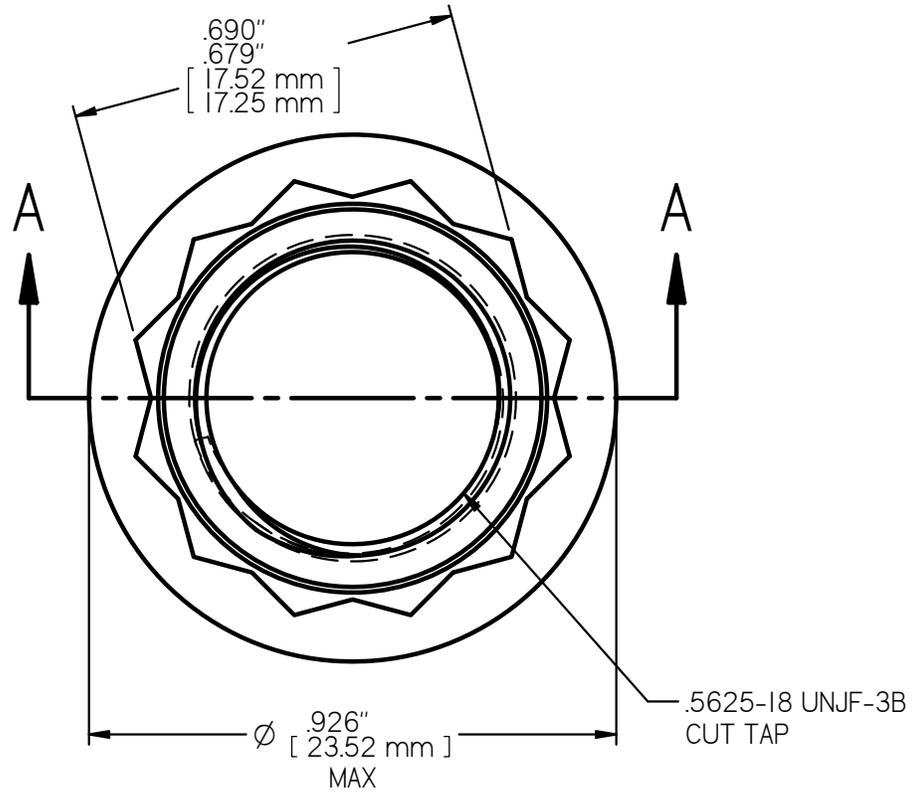

**NAS1804-9 LOCK NUT**  
**AXIAL STRENGTH: 39,200 LBS. [174,370 N.] MIN**

# LEAST MATERIAL CONDITION

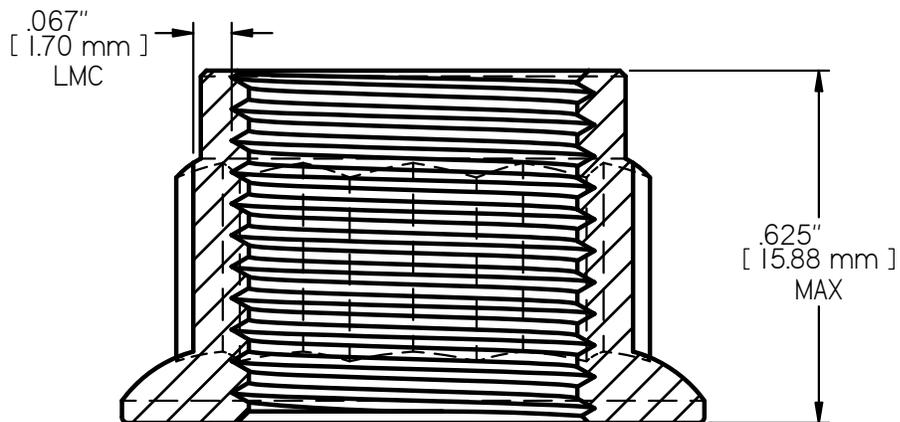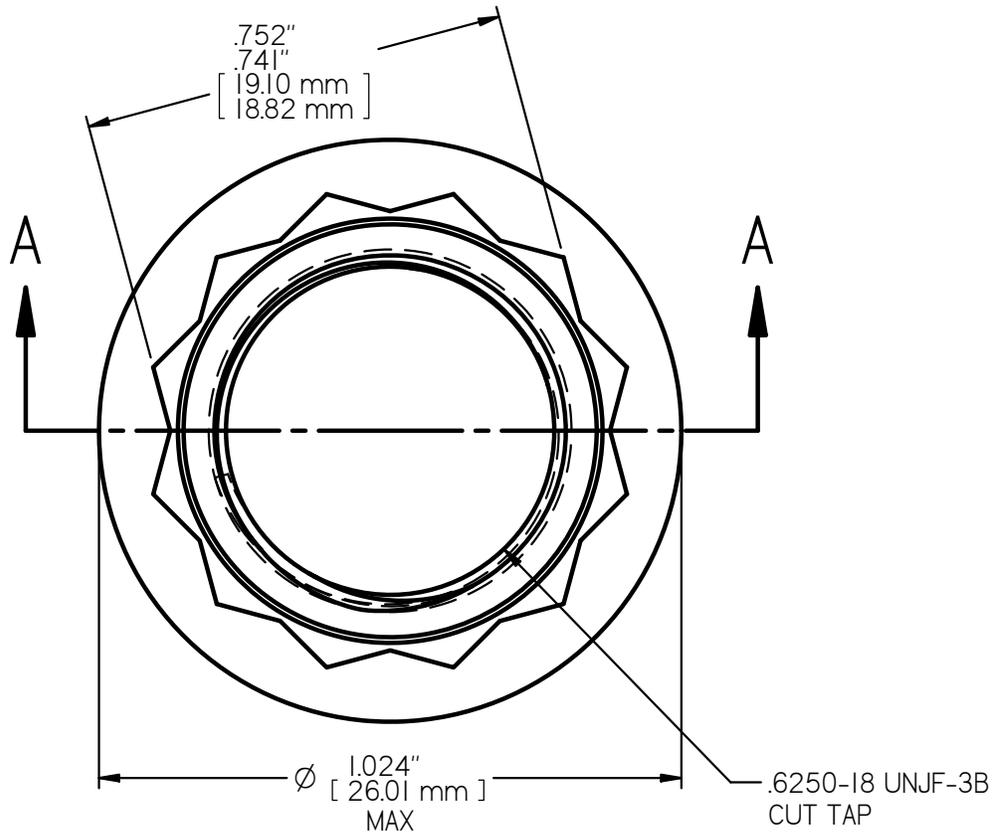

SECTION A-A  
3X SCALE

**NAS1804-10 LOCK NUT**  
**AXIAL STRENGTH: 49,100 LBS. [218,408 N.] MIN**